

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2000-056294

(43)Date of publication of application : 25.02.2000

(51)Int.Cl.

G02F 1/133

(21)Application number : 11-023716

(71)Applicant : SEIKO EPSON CORP

(22)Date of filing : 01.02.1999

(72)Inventor : MAEDA TSUYOSHI  
OKAMOTO EIJI  
SEKI TAKUMI  
OKUMURA OSAMU

(30)Priority



Priority number : 10023656	Priority date : 04.02.1998	Priority country : JP
10096497	08.04.1998	JP
10157622	05.06.1998	JP

## (54) LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC EQUIPMENT

(57)Abstract:

**PROBLEM TO BE SOLVED:** To make an image display with high contrast and high quality both in a reflective display mode and in a transmissive display mode in a liquid crystal display device exchangeable between a reflective display and a transmissive display by suppressing a double image due to parallax and a blot on the display.

**SOLUTION:** When a backlight 15 is turned on in the dark, as light from a light source passes through a semitransparent reflection plate 7 via a polarizing plate 12 and a phase difference plate 14, and it is guided into a liquid crystal layer 3 to perform a transmissive display. In the sun since an incident external light passing through a polarizing plate 11, a phase difference plate 13 and the liquid crystal layer 3 is reflected on the semitransparent reflection plate 7, a reflective display is performed. A driving voltage is switched correspondingly to either a reflective display mode or a transitive display mode in order to apply a driving voltage most suited to reflectance and transmittance characteristics of the driving voltage to liquid crystal.

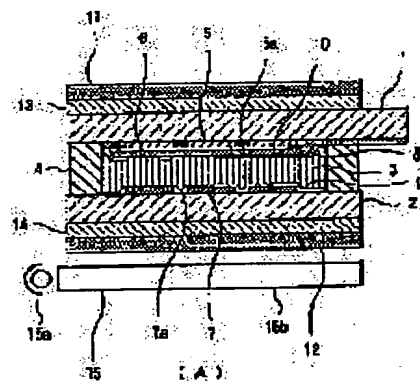

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application]

converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office